


Skagit BU-18 Specifications (Manual Controlled)

Used Diesel Mechanical Rental Winches

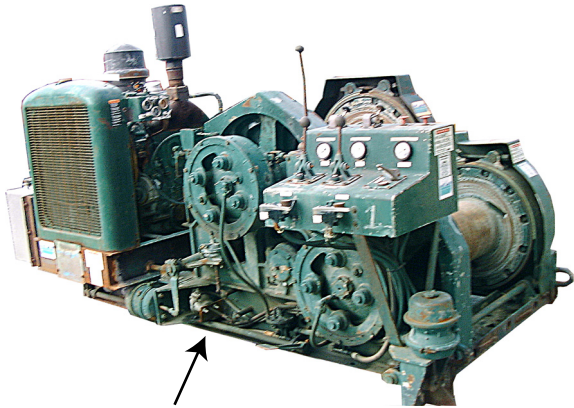

air controlled picture

• Drum Size

- Flange diameter (inches) 30
- Barrel diameter (inches)..... 13
- Barrel length (inches) 30

• Cable Capacity

- 1/2 inch (length in feet) 5,700
- 5/8 inch (length in feet) 3,200
- 3/4 inch (length in feet) 2,475
- 7/8 inch (length in feet) 1,875

Using wire rope larger or smaller than what the winch was designed for could cause serious damage to the winch, operator, ratchets & personnel.

• Maximum Cable Size

- Diameter (inches)..... 7/8

• Approximate Weight


- Double-drum—standard (pounds) 8,500

IMPORTANT

Before installation see maintenance and operations manual for additional warnings and precautions.

This equipment is not to be used for lifting supporting or transporting people or lifting or supporting loads over people.

All quotes are subject to product's availability, prior sale or other disposition. All details are believed correct, but without guarantee. Product quoted present location unless otherwise stated above or mutually agreed upon. Price quotes are valid for 10 days unless otherwise stated above. *Standard rental/sale terms and conditions may be viewed on the homepage at our website, www.rasmussenco.com*

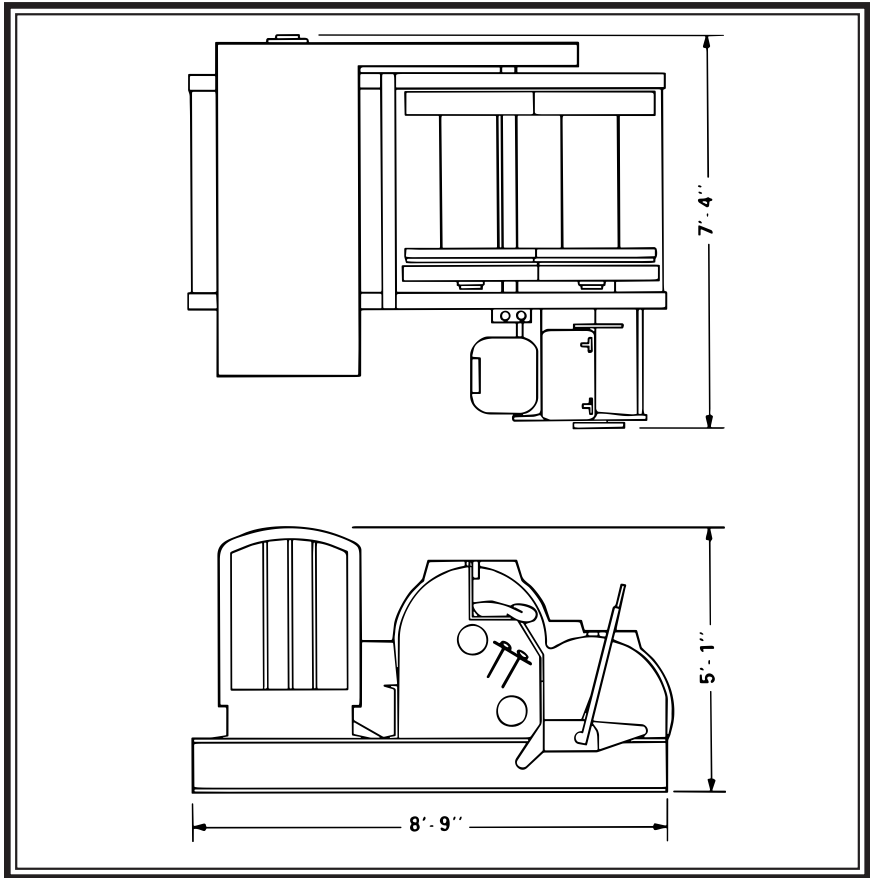

Performance

Typical single drum line pull in pounds and line speed in feet-per-minute with a Detroit Diesel 3-71-HV7 diesel engine driving through a Spicer CM-5052-C transmission with an input ratio of 122/21.

SINGLE DRUM PERFORMANCE			
Drum	Gear	Maximum Pull	Maximum Speed
Bare	1st	33,200 Lbs @ 39 FPM	33,200 Lbs @ 44 FPM
Bare	2nd	32,800 Lbs @ 63 FPM	33,200 Lbs @ 72 FPM
Bare	3rd	18,700 Lbs @ 110 FPM	22,900 Lbs @ 125 FPM
Bare	4th	10,800 Lbs @ 189 FPM	13,200 Lbs @ 216 FPM
Average	1st	21,200 Lbs @ 61 FPM	21,200 Lbs @ 70 FPM
Average	2nd	20,900 Lbs @ 98 FPM	21,200 Lbs @ 112 FPM
Average	3rd	12,000 Lbs @ 172 FPM	14,600 Lbs @ 196 FPM
Average	4th	6,900 Lbs @ 296 FPM	8,500 Lbs @ 338 FPM
Full	1st	15,600 Lbs @ 83 FPM	15,600 Lbs @ 95 FPM
Full	2nd	15,400 Lbs @ 134 FPM	15,600 Lbs @ 153 FPM
Full	3rd	8,800 Lbs @ 234 FPM	10,700 Lbs @ 267 FPM
Full	4th	5,100 Lbs @ 403 FPM	6,200 Lbs @ 460 FPM

Note: Line speed and pull performance on our entire rental fleet is estimated on manufacturer specifications. Consult manufacturer for exact line speeds and pulls.



RASMUSSEN EQUIPMENT COMPANY

Northwest Office

P.O. Box 81206
Seattle, WA 98108
Phone: (206) 762-3700
Fax: (206) 762-5003
equipmentsales@rasmussenco.com

Mooring Systems • Winches • Cranes • Barges
Anchors • Fairleads • Deckleads • Wire Rope

Sales • Rentals

Gulf Coast Office

2220 Engineers Road
Belle Chasse, LA 70037
Phone: (504) 392-0442
Fax: (504) 392-0107
equipbc@rasmussenco.com